

Page 1 of 15



TEST REPORT IEC 60598-2-24 Luminaires

Part 2: Particular requirements Section 24: Luminaires with limited surface temperature

Report Number.....: LCSB12034004S

Date of issue...... December 20, 2024

Total number of pages...... 15 pages

Name of Testing Laboratory

preparing the Report...... Shenzhen Southern LCS Compliance Testing Co., Ltd.

Applicant's name...... RN Solutions ApS

Address...... Hagensvej 14, 9530 Støvring, Denmark

Test specification:

Standard.....: IEC 60598-2-24:2013 used in conjunction with IEC 60598-1:2020

Test procedure.....: Test Report

Non-standard test method.....: N/A

Test Report Form No.....: IEC60598_2_24G

Test Report Form(s) Originator: Intertek Semko AB

Master TRF.....: 2018-04

Copyright © 2018 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the Testing Laboratory, responsible for this Test Report.





Page 2 of 15

Test item description....: Hawkeye 1 UFO LED Trade Mark....: Manufacturer....: RN Solutions ApS Address....:: Hagensvej 14, 9530 Støvring, Denmark RNSHB200CE4HPY5KD120 Model/Type reference....: 120-277V~, 50/60Hz, 200W, IP65, ta45°C, Class I Ratings....: Size: Ф347*142mm X **Testing Laboratory:** Testing location/ address..... Shenzhen Southern LCS Compliance Testing Co., Ltd. Room 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China Tested by.....: Alyson Zhang (Engineer) Check by....:: Torres He (Director)

Jesse Liu

(Manager)

List of Attachments (including a total number of pages in each attachment):

Attachment No. 1: Photo documentation.

Approved by.....:

Summary of testing:

Tests performed (name of test and test clause):

This product has obtained CE certification, so this report only evaluates clauses 24.13 and 24.14 of IEC 60598-2-24.

Testing location:

Shenzhen Southern LCS Compliance Testing Co., Ltd.

Report No.: LCSB12034004S

Room 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China

Summary of compliance with National Differences:

List of countries addressed

EN 60598-2-24:2013;

EN IEC 60598-1:2021+A11:2022





Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

Hawkeye 1 UFO LED

Model: RNSHB200CE4HPY5KD120

120-277V~, 50/60Hz, 200W



RN Solutions ApS Importer: xxxxxxx Address: xxxxxxx



"caution, electric shock risk" symbol, height of this marks least 15mm.

Remarks:

- 1. Height of CE mark at least 5mm, height of WEEE symbol should not less than 7mm, height of other marks at least 5mm, height of letters and numerals at least 2mm.
- 2. According to the EU directives which have been aligned with EU NLF (new legislative framework), both of manufacturer and importer's name and address shall be affixed on the product or, where that is not possible, on its packaging or in a document accompanying the product before the product is placed on the EU market.







Report No.: LCSB12034004S





Page 4 of 15 Report No.: LCSB12034004S

Test item particulars	:		
Classification of installation	and use:	Fixed luminaires for indoo	or and outdoor use
Supply Connection	:	Supply cord	
Protection Class	:	Class I	
Degree of Protection	:	IP65	
Possible test case verdicts:			
- test case does not apply to	the test object:	N/A	
- test object does meet the re	equirement:	P (Pass)	长河股份
- test object does not meet th	ne requirement:	F (Fail)	立河 Tiff ing Lab
Testing	:		100
Date of receipt of test item	:	December 03, 2024	
Date (s) of performance of te	sts:	December 03, 2024 - Dec	ember 13, 2024
General remarks:			
"(See Enclosure #)" refers to a			
"(See appended table)" refers	• •	•	
Clause numbers with "*" were	·	· ·	Library Vanna Baratan and
The general information of approach model/type reference, tradema			
the applicant, the laboratory is			工训证
Ce Je	LCS TES		
Throughout this report a 🖂	comma / point is us	sed as the decimal sepa	rator.
	Modified In	formation	
Version	Report No.	Revision Date	Summary
V1.0	LCSB12034004S	1	Original Version
Manufacturer's Declaration p	per sub-clause 4.2.5 of	IECEE 02:	
The application for obtaining a	CB Test Certificate	☐ Yes	
includes more than one factory		Not applicable	- 113
declaration from the Manufactus sample(s) submitted for evaluation		金利用於77	上CS Testing Lab
representative of the products		亞河 Lab	WST CS Testing La
been provided			150
When differences exist; they	shall be identified in the	he General product inform	nation section.
Name and address of factor	y (ies):	Same as manufacturer	





Page 5 of 15

Report No.: LCSB12034004S

Till Tastin	g Lab	Till Testing Lab	五河 Tastir
LCS 1	IEC 60598-2-24	rce .	LCS 1
Clause	Requirement + Test	Result - Remark	Verdict
24.5	CLASSIFICATION		Р
	Luminaires shall be classified in accordance with the provisions of Section 2 of IEC 60598-1	Class I	Р
	a) Luminaire where no unusual accumulation of dust is expected	Yes □ No ⊠	_
	b) Luminaire where an accumulation of non- conductive dust may be expected	Yes □ No ⊠	_
WS.	c) Luminaire where an accumulation of conductive dust may be expected	Yes ⊠ No □	_
15		1	
24.6	MARKING		Р
	The provisions of Section 3 of IEC 60598-1 apply together with the following requirements		Р
24.6.1 (-)	Symbol for luminaire with limited surface temp.		Р
	Marking visible	D	Р
24.6.2 (-)	Classification of the luminaire according 24.5 in manufacturers literature		Р
可給测用	支付 工	工统测度·第	اللاشد
24.7	CONSTRUCTION	- 2M 125 - 1 2D	CSRestin
	The provisions of Section 4 of IEC 60598-1 apply, together with the requirements of 24.7.1 and 24.7.2 below		Р
24.7.1 (-)	Degree of protection		Р
	IP4X at least	Yes □ No ⊠	N/A
	IP5X if presence of dust	Yes □ No ⊠	N/A
	IP6X if presence of conductive dust	Yes ⊠ No □	Р
	At least IP 5X or IP6X for certain locations according IEC 60364-4-42		P
24.7.2 (-)	Applicable surfaces comply with requirements of horizontal surfaces	IIS 立语检测	Lab P
	Vertical surfaces not complying with spacing requirements in 24.13 comply with the limits for horizontal surfaces		Р
24.8	CREEPAGE DISTANCES AND CLEARANCES		N/A
	The provisions of Section 11 of IEC 60598-1 apply		N/A







Page 6 of 15

LCS Testing	IEC 60598-2-24	LCS Testing Lab	LCS Testin
Clause	Requirement + Test	Result - Remark	Verdict

Report No.: LCSB12034004S

24.9	PROVISION FOR EARTHING		N/A
	The provisions of Section 7 of IEC 60598-1 apply		N/A

24.10	TERMINALS AND E	LECTRICAL CONNECTIONS	N/A
	The provisions of Se apply	ctions 14 and 15 of IEC 60598-1	N/A
VE	I ICS Testing	US Testing	NST ICS Testing

24.11	EXTERNAL AND INTERNAL WIRING		N/A
	The provisions of Section 5 of IEC 60598-1 apply		N/A

24.12	PROTECTION AGAINST ELECTRIC SHOCK	
	The provisions of Section 8 of IEC 60598-1 apply	N/A

24.13	ENDURANCE TEST AND THERMAL TEST		Р
- : A 检测图	If IP > IP 20 relevant test of (12.4), (12.5) and (12.6) after (9.2) before (9.3) specified i 24.14		
LCS Testing	The provisions of Section 12 of IEC 60598-1 apply, together with the requirements of 24.13.1 to 24.13.3 below	LOS Testina	LCSP estin
24.13 (-)	Temperature limit for vertical surfaces with gap < 30 mm	(see Annex 1)	Р
24.13.1 (-)	Special temperature limits – normal operation	(see Annex 1)	Р
24.13.2 (-)	Special temperature limits – abnormal operation	(see Annex 1)	N/A
24.13.3 (-)	Special temperature limits – fault conditions	(see Annex 1)	N/A

24.14	RESISTANCE TO DUST AND MOISTURE			份 P
	The order of tests as specified in clause 24.13)	立语检测"	Lab P
184	The provisions of Section 9 of IEC 60598-1 apply	IP65	VSI LCS I	Р

24.15	INSULATION RESISTANCE AND ELECTRIC STRENGTH	
	The provisions of Section 10 of IEC 60598-1 apply	N/A







Page 7 of 15

一一识和	Lab	古识描述 Lab	Lab + iHi	
LCS Testills	IEC 60598-2-24			
Clause	Requirement + Test	Result - Remark		Verdict

24.16	RESISTANCE TO HEAT, FIRE AND TRACKING		N/A
	The provisions of Section 13 of IEC 60598-1 apply		N/A

Report No.: LCSB12034004S













Page 8 of 15 Report No.: LCSB12034004S

5/	LCS Testing	IEC 60598-2-24	LCS Testing	VS LCS Testin
	Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 1	TABLE: Temperature measurements, thermal tests of Section 12				
	Type reference	RNSHB200CE4HPY5KD120	_		
	Lamp used:	LED module	_		
	Lamp control gear used	SS-200CNL-E260B	_		
	Mounting position of luminaire	See product manual	_		
- 1	Supply wattage (W)	201,5W	_		
1627	Supply current (A):	0,713A	<u>—</u>		
	Calculated power factor	0,963	_		
	Temperatures in test 1 - 4 below are corrected for ta (°C):	45	_		
	- abnormal operating mode	Short-circuited output of LED driver. LED driver protection immediately, no temperature values were recorded.	_		
	- test 1: rated voltage:		_		
2.31检测股外	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current:	1,06x277V	_		
I LCS Testing	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	CS Testing L	_		
	Through wiring or looping-in wiring loaded by a current of A during the test:		_		
	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current or 130/150% of rated input voltage:		_		

Temperature measurements, (°C)

Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
Pail		test 1	test 2	test 3	limit	test 4	limit
Supply cord	45	- ti	54,6		90	古语 ^{检测}	19 Fap-
tc of LED driver	45	1/20 rcs	71,9		90	1 /cz/,	
Output wire of LED driver	45		62,3		90		
LED PCB	45		86,3		130		
Internal wire near LED	45		85,4		90		
LED cover	45		73,2		Ref.		
Mounting surface	45		61,8		90		









Page 9 of 15

LCS Testine	N.	LCS Test	IEC 60	598-2-24	LCS Testin	19	115	LCS Testin
Clause Requirement + Test					Result - F	Remark		Verdict
Horizontal s	side of enclosure	45		74,6		90		
Vertical side	e of enclosure	45		70,2		150		
Vertical side	e of enclosure the wall	45		68,4		90		

Supplementary information:









Report No.: LCSB12034004S





Photo Documentation

Report No.: LCSB12034004S



Photo 1



Photo 2



Shenzhen, Guangdong, China Tel: +(86) 0755-29871520 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com Scan code to check authenticity



Photo Documentation

Report No.: LCSB12034004S



Photo 3

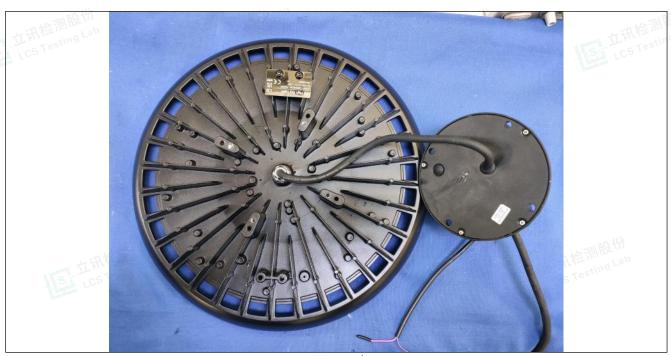


Photo 4



Shenzhen, Guangdong, China Tel: +(86) 0755-29871520 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com Scan code to check authenticity



Photo Documentation

Report No.: LCSB12034004S



Photo 5



Photo 6



Scan code to check authenticity





Photo Documentation

Report No.: LCSB12034004S



Photo 7

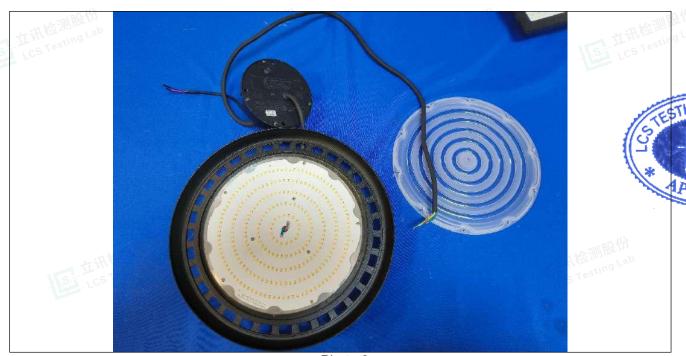


Photo 8







Photo Documentation

Report No.: LCSB12034004S



Photo 9

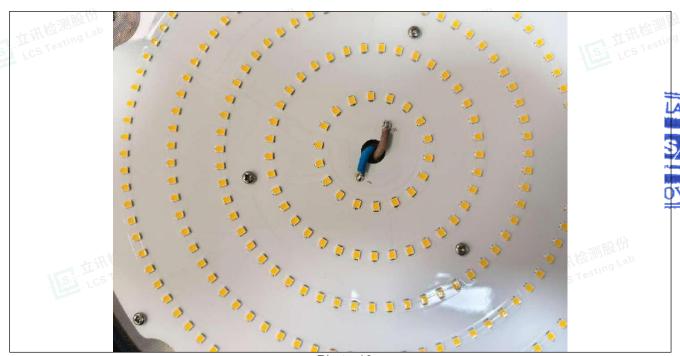


Photo 10







Photo Documentation

Report No.: LCSB12034004S



Photo 11

----End of Test Report---LCS Testing Lab









立流^版 LCS Testing Lab