



## Installation Guidance

### 1 Mounting Methods




Length  
1200mm  
1500mm

- Ceiling
- Wire
- Horizontal
- Vertical




### 2 Input Cable

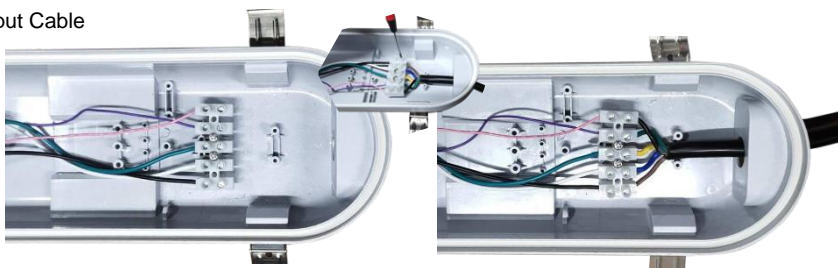


Place 5 wires Dim (-), Dim (+), Ground (PE), Neutral (N) & Line (L) in right order. Dim (-) and Dim (+) must be installed last.

### 3 Wires



Make sure to use only Dim - & Dim + signal wires in right position

Line (L), Neutral (N) & Ground (PE) connected as shown, from left to right.

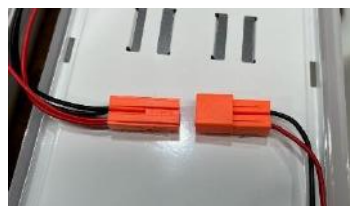

Orange connectors between PCB and power supply must be connected black-to-black and red-to-red.

### 5 Remarks

- Be sure to fix the luminaire in brackets and place all wires correctly to avoid short circuit.
- Refer to the label on the luminaire for technical specifications.



# USER'S MANUAL

## VIKING LED LUMINAIRE



## CONTENTS

|                       |   |
|-----------------------|---|
| Foreword              | 2 |
| Safety Instructions   | 2 |
| Important information | 3 |
| Product Dimensions    | 3 |
| Step-by-Step          | 3 |
| Installation Guidance | 4 |

## Foreword

Thanks for choosing our Viking LED Luminaire. We strongly recommend you to read this manual carefully before installation. Make sure you have understood the assembly instructions correctly, to ensure the right performance of our Viking LED Luminaire.

\* *Kontakt venligst RN Solutions ApS, hvis du ønsker brugermanualen på Dansk.*  
\* *Vänligen kontakta RN Solutions APS, om du önskar manualen på Svenska.*  
\* *Bitte kontaktieren Sie RN Solutions ApS, wenn Sie das Handbuch auf Deutsch verwenden möchten.*

RN Solutions ApS

Phone +45 9838 5995

E-mail: [info@rnsolutions.dk](mailto:info@rnsolutions.dk)

## Safety Instructions

In order to ensure product stability and a safe application, please kindly follow the instructions:

1. Before opening the package, please check if there has been damage or defect during transportation, if damage occurs, please do not use it and inform your supplier immediately.
2. Should the product be found damaged in any way, please do not unpack and contact your supplier in time.
3. Please do not attempt to use a damaged product.
4. The product should be installed, dismantled, and maintained only by a qualified electrician. This manual prohibits all mishandling of the supplied products and accessories like e.g., wrong installation etc.
  - **DISCLAIMER:** Suppliers do not take responsibility for any problems or damages that occurs due to mishandling the product.
5. The luminaires can be jet-washed. Keep a distance from luminaire of min. 70cm. Be sure not to use any sandpaper, polishing powder or alcohol, dissolvents, and similar liquids.
6. Do not connect the cables while the luminaire is powered on.


This manual applies to this specific product only.

For more information, please contact your supplier.

## Important information

- This product is only for fixed installation and must be installed by an electrician.

## Product Dimension (mm)

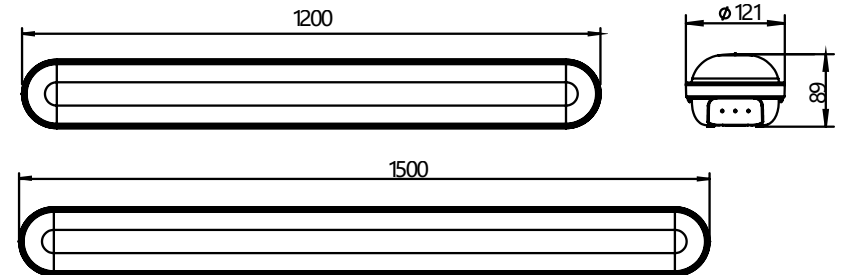

| ITEM        | SIZE   | POWER (W) | In-Rush Current & Time | Leakage Current |
|-------------|--------|-----------|------------------------|-----------------|
| ABD120_361F | 1200mm | 25-40W    | 27.6A, 94.5µs          | 2.1mA           |
| ABD150_501F | 1500mm | 50-60W    | 29.8A, 99.2µs          | 2.24mA          |

## Step-by-step

